


CODE SOFT®

EASY BAR 4e / 4i

BARCODE PRINTER

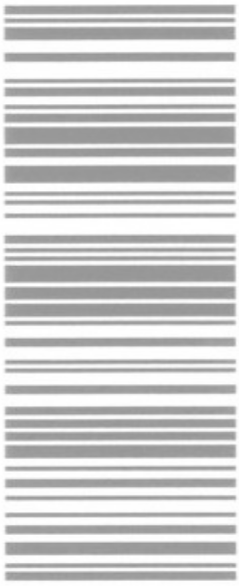

Key Feature

-Affordable to Own

It is designed to maximize your investment value by offering a competitive price, durable walled construction and proven design for long term reliability

- Easy to Use

Easy to replace existing printers or install new ones with populars language emulations
Included barcode design software and a selection of connectivity.

- Economical to Operate

Reduce daily operational costs by minimizing the power consumption and the cost of associated with printer consumables - Label and ribbon.



TELECOM
www.code-soft.com



ELECTRICS
www.code-soft.com



TAXATION
www.code-soft.com



BANK
www.code-soft.com



RETAIL
www.code-soft.com



POST
www.code-soft.com

➡ EASY BAR 4e / 4i barcode printer

► Specification

Model	4e	4i
Printing method	Direct thermal & Thermal transfer	
Resolution	203 DPI (8 dots/mm)	300 DPI (11.8 dots/mm)
Maximum print speed	6 IPS(152.4 mm/s)	4 IPS(101.6 mm/s)
Maximum print width	4.09"(104 mm)	4.15" (105.6 mm)
Maximum print length	157.5" (4000mm)	78.7" (2000mm)
Memory	2 MB FLASH ROM, 2 MB SDRAM	
Media	Roll-feed, die-cut, continuous, fan-fold, tags, tickets in plain paper or thermal paper Width: 4.5" (114 mm) max., 0.8" (20 mm) min. Supply roll: OD 5"(127 mm) max., ID 1"(25.4 mm) min. Thickness: 0.08~0.20m (0.003"~0.0078"), including liner	
Ribbon	Wax, Wax/Resin, Resin Ribbon roll: OD 2.75"(70 mm) max. with ID 1"(25.4 mm) core or ID 0.5"(12.7 mm) core Max width: 110 mm; Max length: 300 M	
Media sensor	Adjustable reflective & Transmissive	
Bar Code Types	1D Barcode : Code 39, Code 93, Code 128, Codabar, EAN-8/13/128, Interleave 2 of 5, UCC-128, UPC A/E 2 and 5 add-on, etc. 2D Barcode : Data Matrix, MaxiCode, PDF417, QR, etc.	
Interfaces	RS-232 serial, USB	
Power rating*	24 VDC, 2.5 A	
Weight	2.62 kgs	
Dimensions	W208 x D310 x H195 mm	
Operation environment	Temperature: 32 F ~ +104 F (0 C ~ 40 C) Relative humidity: 5% - 85% non condensing	
Storage environment	Temperature: -40 F ~ +140 F (-40 C ~ 60 C) Relative humidity: 5% - 85% non condensing	
Optional items	Peeler kit, Internal 100/10 M Ethernet Interface card	

► Specifications for Power Adapter

Input	AC 100~240 V, 47~63 Hz
Output	DC 24 V, 2.5 A
Environment	0 C ~ 40 C