GBC

HeatSeal® H535 *Turbo*

Effectively bridging the 'gap' between classic 'Office' use and those who demand much more of a Pouch Laminator!
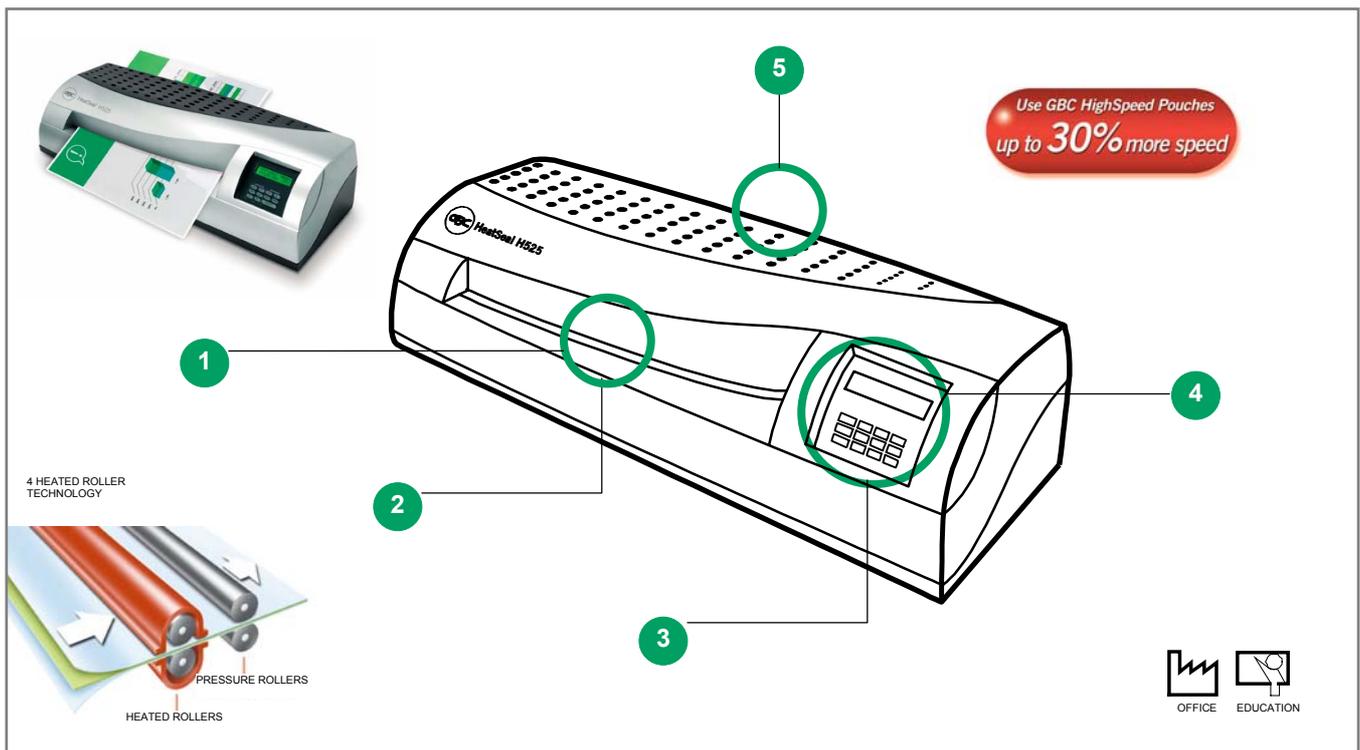
Variable speed & temperature via easily controllable and adjustable settings on the electronic display, the HeatSeal H535 Turbo produces excellent laminates of all thicknesses of Pouch up to 250 micron per side. At speeds of up to 1000 mm/min or approximately 200 A4's per hour or as many as 277 A4's per hour with GBC High Speed Pouches.

- Lamination width* from ID size to **A3 Max** (324 mm)
- **4 Roller design** (2 Heated + 2 'Pressure')
- Variable Temperature (up to 2 x 250 Mic. (**500 Total**)) + 'Cold' setting
- Variable Speed: 6 settings
- Auto switch off
- Digital display with 4 pre-set temperature & 6 speeds

* Lamination Width is the maximum insert width

Features & Benefits

1 **Pouch thickness:** laminates up to 500 Micron (2 x 250 Micron per side)

2 **Speed up to 1000 mm/min**

3 **'Ready Glow' light**
It glows red when correct operational temperature is reached.

4 **Digital Display: Pre-set temperature settings and 6 speeds.**
Keeps users constantly in control of speed and temperature, the key factors of successful lamination.

5 **Reverse mode:** Anti-jam function to solve any miss-feeding problems.

6 **Large Exit Tray**
Keeps the laminated product straight on exit minimising curling and warping.

7 **Only 3 to 4 minutes 'Warm up' period**

8 **Pouch Counter**

4 HEATED ROLLER TECHNOLOGY

PRESSURE ROLLERS
HEATED ROLLERS

Use GBC HighSpeed Pouches up to **30%** more speed

OFFICE   EDUCATION

Technical Specifications

Photo quality	Yes		Pouch counter	Yes
Heat-up Time (75 mic)	3-4 min.		Auto switch off	Yes
Speed mm/min.	1000		Time to laminate 1 A4 sheet with Standard Pouch	18 sec.
Temperature control	Variable (Display)			
Cold Lamination	Yes		Time to laminate 1 A4 sheet with a High Speed Pouch	13 sec
Speed control	Variable/6 std settings			
Rollers	4		A4 Laminates / hr*	200
Max. Document size	A3		High Speed Pouches Laminates / hr*	Yes 277
Max. pouch thickness	2x250 Micron (500 Total)			
Ready Lamp	No		Dimensions	TBC
Ready Glow	Yes		Certification	GS / TÜV / CE
Release Function	No		Weight	TBC
Reverse	Yes		Power Consumption Watts / Amps	TBC
Display	Yes			

* Estimates only