


# MAGNER® 75 Series

The 75 Series Currency Counters offer performance and productivity over a wide range of applications. Choose from a basic model with variable batching or a more advanced model with dual head, dual threshold magnetic counterfeit detection or ultraviolet detection, or both in combination to the most advanced of piece and value counting mixed denominations based on 3-D size detection.

The V models are capable of extending the dollar value of currency denominations and tracking totals at the denomination, batch, and grand levels. Equipped with an optional printer, the 75V provides a detailed audit trail for improved control of cash counting and balancing operations.

MAGNER® Currency Counters have evolved from years of experience and are supported through our network of Authorized Distributors and our direct Technical Support Team (TST).

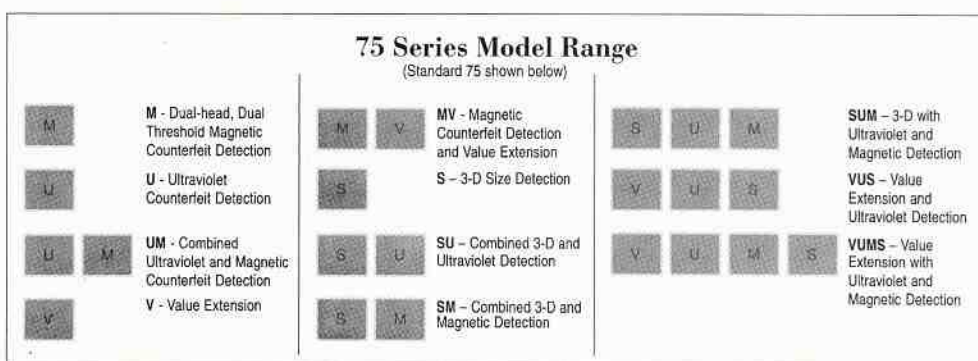

Local Representative:

Standard 75

**MAGNER®**

## 75 Series Specifications

**Counting Speeds:**  
600, 1200 and 1500 notes per minute (selectable)

**Display Type:** LCD  
3 digit batch display  
4 digit piece count display  
(V-Type Models Display: LED as above plus 9 digit value total display)

**Document Size Limits:**  
1.97 x 3.54" to 3.94 x 7.28"  
50 x 90 mm to 100 x 185 mm

**Hopper Capacity:**  
500 circulated notes

**Stacker Capacity:** 150 notes

**Batching:** Variable 1 to 999  
(also preset batches of 5, 10, 20, 25, 50, 100 notes and 'off' on V-type models)

**Error Detection:**  
Double, chain, half-note, jam (standard)  
Counterfeit suspect (optional)

**Counterfeit Detection (optional):**  
Dual-head, dual threshold  
3-D size detection  
magnetic detection  
Ultraviolet detection

**Document Feed Mechanism:**  
Friction, intermittent roller type

**Dimensions:**  
10.04" (H) x 11.02" (W) x 9.06" (D)  
255 mm (H) x 280 mm (W) x 230 mm (D)

**Net Weight:**  
15.50 lbs. (18.19 lbs. boxed)  
7.03 kg. (8.25 kg. boxed)

**Power Source:**  
120V 60Hz/230V 50Hz (switch selectable)

**Power Consumption:** 70W (avg.)

**Temperature Limits:**  
Operating:  
+32° F to +104° F (0° C to +40° C)  
Storage:  
-22° F to +185° F (-30° C to +85° C)

**Density Setting:**  
Adjustable, 4 levels

**Connection:**  
RJ45-type for external display  
RJ45-type for RS232 interface

**Other Options:**

- External Display
- Vault management system interface software
- 40 column dot matrix printer (V-type models only)

SPECIFICATIONS ARE SUBJECT TO CHANGE

