




A Strong Holding Power with EM600 or EM1200 Electromagnetic Lock Series



EM600 and EM1200 electromagnetic locks are cost effective accessories for a perfect access control system. The model EM600 offers 520 lbs of holding force and is good for all types of doors, while the model EM1200 provides extra holding power when required. Both models are easy to install and suitable for a large variety of applications. It has no moving parts thus keeping maintenance to a minimum. All types of brackets are available as add-ons to ease installation for both in-swing and out-swing doors.

INSTALLATION GUIDE

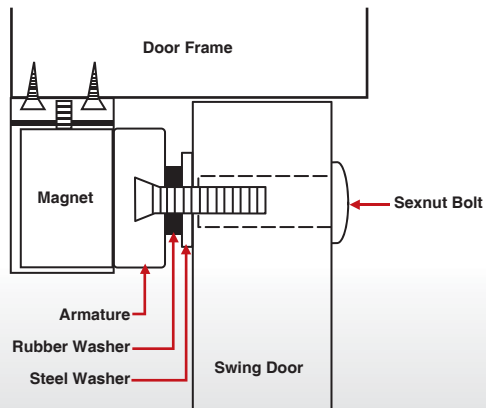


SPECIFICATIONS



MODEL	EM600	EM1200
PRODUCT DIMENSION (L X W X H), mm	250mm x 41 mm x 26 mm	265mm x 66mm x 40mm
POWER INPUT	DC12V	DC24V
CURRENT DRAW	Stand-by: 250mA, Activity: 500mA	
HOLDING FORCE	Approximately 520lbs	Approximately 900lbs
TYPE	Fail-Safe	
APPLICABLE TO	Wooden Door, Glass Door, Grill and Gate	
POWER SURGE PROTECTION	MOV	
AUTHORIZATION CERTIFICATES	CE	




L - Bracket

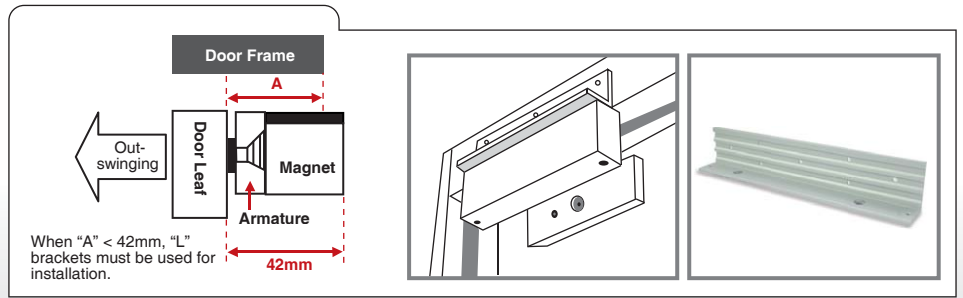

When "A" < 42mm, "L" brackets must be used for installation.


- Adjustable "L" bracket for outward door when the header is narrow.
- Available for EM600 & EM1200 Series.

Z - Bracket

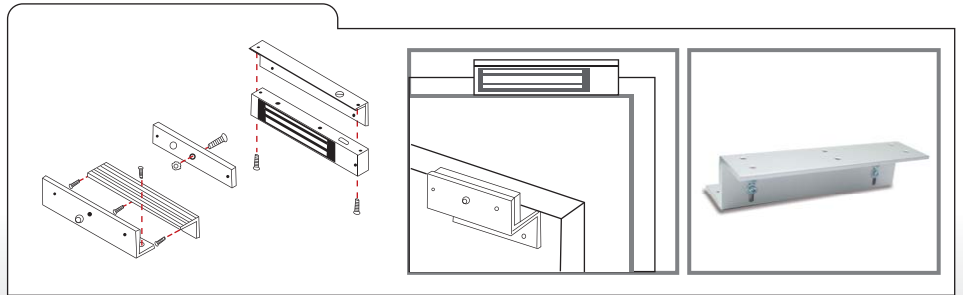

- Adjustable "ZL" bracket for inward door application.
- Available for EM600 & EM1200 Series application.

U - Bracket

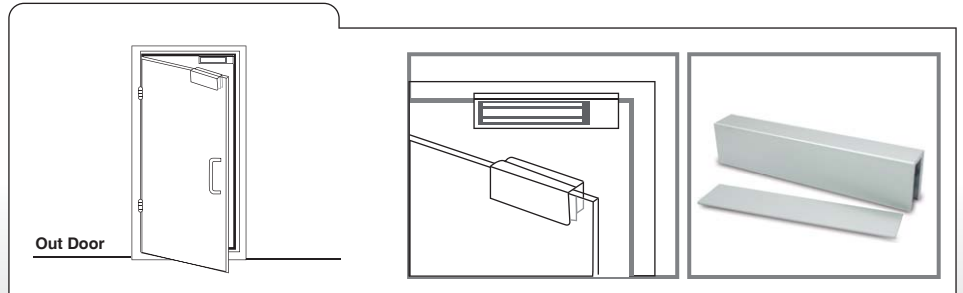

- Specially designed for glass door solution.
- Available for EM600 & EM1200 Series.

MOUNTING DIAGRAM

Standard	L - Bracket	Z - Bracket
<p>With Filler Plate attached on top of EM Lock.</p>	<p>Mounting with "Adjustable L Bracket" when door frame is narrow.</p>	<p>Mounting with " ZL Bracket " for in-swinging door application.</p>
<p>Mounting Procedure: Remove the original "Filler Plate" attached to the EM Lock, and replace with " Adjustable L Bracket " set.</p>		

Authorized Reseller: