

The Core Drill Resistant Safe has been specifically design for very high risk protection. The Core Drill Resistant provides excellent resistance against high powered tools including Diamond Core Drill attacks.

- Treasury Safe
- Sovereign Safe
- Resolute Safe



# Diamond Core Drill Resistant Safe

## BURGLARY-RESISTANT PROTECTION

### Key Features

- **Body** – The body consists of inner and outer plates enclosing a seamless casting of Chubb safes own multi-layered Core Drill Resistant barrier material offering resistance against various forms of attacks that includes the Diamond Core Drill. The overall thickness of the body is 100mm.
- **Door** – The door has an overall thickness of 212mm with an effective protective thickness of 100mm. Like the body, the door is filled with the multi-layered Core Drill Resistant material. For additional fire protection, a steel pan filled with fire resistant material is secured to the back of the door. The door is secured by 3-way moving bolts with deadbolts fixed to the back edge. All bolts measure 32mm in diameter.
- **Diamond Core Drill Resistant for:**  
 Treasury Safe – up to 2 hours  
 Sovereign Safe – up to 2 hours 50 mins  
 Resolute Safe – up to 5 hours
- **Locking** – Fitted with a 3 or 4-wheel Keyless Combination Lock and a 11-lever Key Lock with non-detachable key bit as standard. Both locks operate independently of each other. Both locks are protected by a Glass Relocker. The Relockers further protected by drill resistant hard plates. This further strengthens the drill resisting qualities of the Relocker. An additional “LIVE” Relocker is fitted for further protection.
- **Fire Resistance** – Tested in accordance to Section 8.5 of the Japanese Industrial Standard JIS S1037 – 1987 for a 90 minutes fire rating.
- **Fitting** – The safe comes with a standard internal steel shelf, adjustable at intervals to suit individual customer requirements. Internal drawers are made of steel and are individually secured by a key lock with keys in duplicate.
- **Finish** – A Polyurethane based paint finish is used to coat the body and door. The paint is both scratch resistant and durable.





**Chubb safes**  
*Trusted the world over.*

BURGLARY  
 PROTECTION

## Product Specifications

External (mm)					Internal (mm)											
(A) Height	(B) Width	(C) Depth	(D) Clear depth over furniture	(E) Furniture Projection	(F) Height	(G) Width	(H) Depth	(I) Door swing	(J) Depth with door at 90°	(K) Width when door is fully open	(L) Drawer height	Approx Nett weight(kgs)	Approx Gross weight(kgs)	Capacity (Litres)	No. of Front Bolts	No. of Shelf
1657	743	830	915	85	1457	543	546	658	1530	1379	131	1430	1520	432	6	2

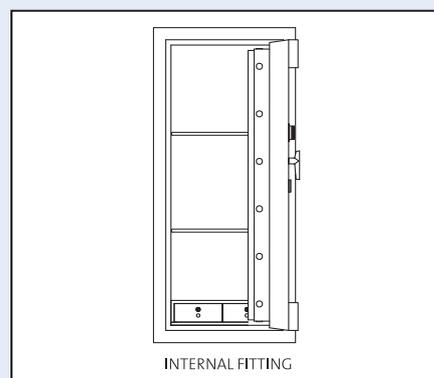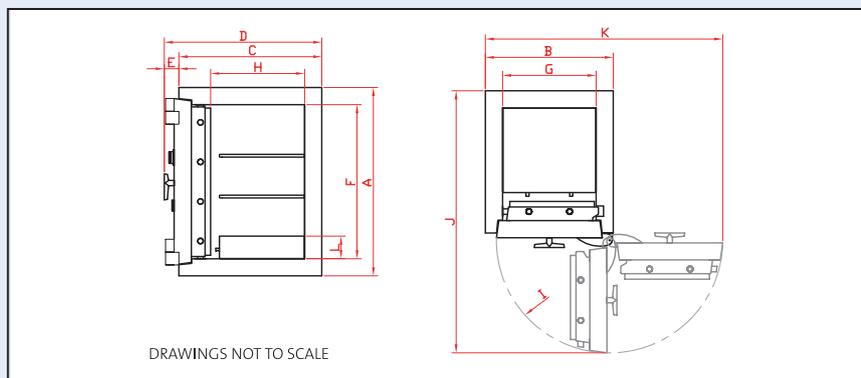

Resolute

Sovereign

Treasury

### Keyless combination Lock

The operation of this lock is simple. The code can be changed easily and security can be maintained over the door whenever there is a change of staff.

#### • Treasury Safe

Secured by one 3-wheel combination lock listed under UL Group 2, VdS Class 1, CEN A. Capable of 1,000,000 changes of code.

#### • Sovereign Safe & Resolute Safe

Secured by one 4-wheel combination lock listed under UL Group 2, VdS Class 2, CEN B. Capable of 1,000,000,000 changes of code.

### Key Lock

Secured by one 11-lever double bitted Key Lock from Germany.

## Options

- A Dial Check Locks can be fitted to the combination lock as an option.
- A choice of two or three movement timelocks may also be fitted as an additional requirement.



Diamond Core Drill Test



Authorised dealer:

# Chubb Safes

*Trusted the world over.*

GUNNEBO MALAYSIA SDN. BHD. (877658-K)

Suite 13A.01, Level 13A,

Menara Summit,

Persiaran Kewajipan, USJ 1,

47600 Subang Jaya, Selangor

Tel : +603-8024 3050

Fax : +603-8024 3051

Website: www.gunnebo.com.my

E-mail: info.my@gunnebo.com